




**EDGEWOOD™ 44**

**FP9044\*\***  
**44" Ceiling Fan**

	<b>A</b>	<b>B</b>
Fan In Close to Ceiling Configuration	10.03"	8.35"

	<b>A</b>	<b>B</b>
Fan w/4.5" downrod	13.66"	11.98"
Fan w/12" downrod	21.16"	19.48"
Fan w/18" downrod	27.16"	25.48"
Fan w/24" downrod	33.16"	31.48"
Fan w/36" downrod	45.16"	43.48"
Fan w/48" downrod	57.16"	55.48"
Fan w/60" downrod	69.16"	67.48"
Fan w/72" downrod	81.16"	79.48"

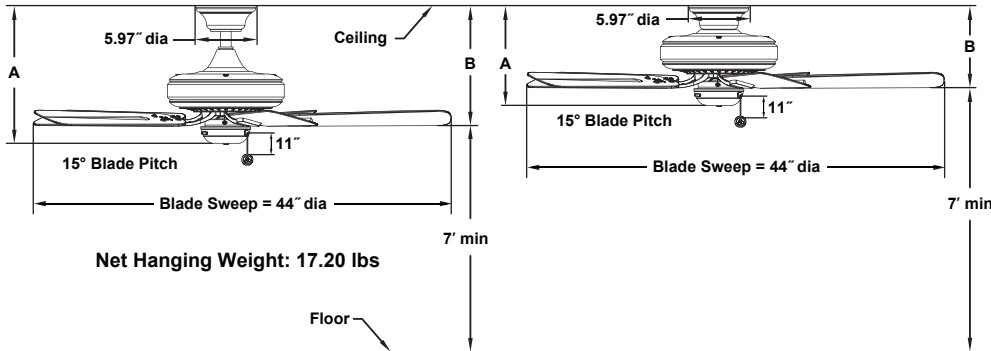

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

153 x 18 AC motor is designed for optimal performance with this fan.

**BLADE SET:**

A set of five 17" composite blades is included.

**CONTROL OPTIONS:**

Three fan speeds pull chain control included. The reverse switch is located on the switch housing. Optional CW5, WC1WH, WC2WH, WR500WH, WR501WH and CWRL4 wall controls are available, optional BTR9, CRL4WH and CR500 remote controls, BTR9 receiver unit and WFR50 WiFi receiver unit are available — sold separately. Instructions are provided with each control.

**DOWNROD OPTIONS:**

Fan comes with 1" dia. x 4.5" long wet-location downrod (DR1SS-45). Optional wet-location downrods are available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 17°. Most sloped ceiling installations require a standard 12" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry, damp and wet locations. This fan is for room up to 225 sq ft.

Available Finishes	
BNW	Brushed Nickel Wet with Dark Walnut Blades
BLW	Black Wet with Black Blades
DZW	Dark Bronze Wet with Dark Walnut Blades
MWW	Matte White Wet with Matte White Blades

Airflow / Energy Efficiency Info (120V)-Hugger					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	204	4180	69	0.51	61
Med	142	3037	100	0.37	30
Low	80	1684	158	0.22	11

Airflow / Energy Efficiency Info (120V)-Standard					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	204	4426	73	0.51	61
Med	142	3219	106	0.37	30
Low	80	1735	161	0.22	11

Energy Guide FTC (Hugger)			
Power (Wave)	Total Air Delivery (CFMave)	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
37	3010	10	81

Energy Guide FTC (Standard)			
Power (Wave)	Total Air Delivery (CFMave)	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
37	3165	10	85