


**XENO™ WET**

**FP6729B\*\*  
Ceiling Fan**

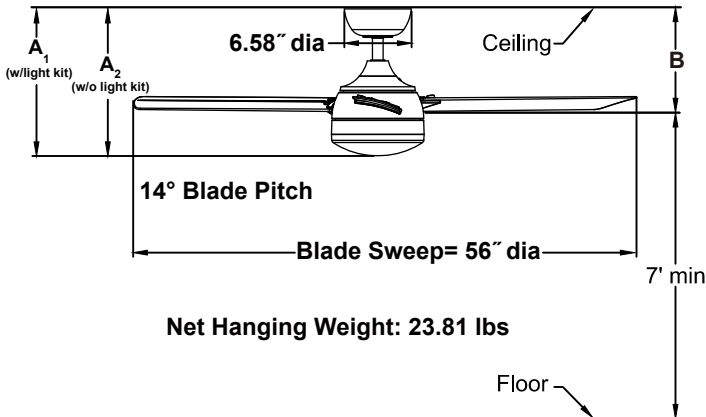

	A <sub>1</sub>	A <sub>2</sub>	B
Fan w/4.5" downrod	14.54"	14.54"	10.24"
Fan w/12" downrod	22.04"	22.04"	17.74"
Fan w/18" downrod	28.04"	28.04"	23.74"
Fan w/24" downrod	34.04"	34.04"	29.74"
Fan w/36" downrod	46.04"	46.04"	41.74"
Fan w/48" downrod	58.04"	58.04"	53.74"
Fan w/60" downrod	70.04"	70.04"	65.74"
Fan w/72" downrod	82.04"	82.04"	77.74"

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

188 x 25 AC motor is designed for optimal performance with this fan.

**BLADES:**

A set of three 24.5" composite blades is included.

**LIGHTING OPTIONS:**

One 18-watt LED included.

**CONTROL OPTIONS:**

TR500 hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional CWRL4\*\*, WC2WH and WR501WH wall controls, BTRC9, CRL4WH hand held remote controls and BTR9 and WFR50 receiver are available —sold separately. Instructions are provided with each control.

**DOWNROD OPTIONS:**

Fan comes with 1" dia. x 4.5" long wet-location downrod (DR1SS-45). Optional wet-location downrods are available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry, damp and wet locations.

**Available Finish**

BLW	Black with Dark Black Blade
DZW	Dark Bronze with Dark Bronze Blade
MWW	Matte White with Matte White Blade
SLW	Silver with Silver Blade

**Airflow / Energy Efficiency Info (120V)**

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	190	6475	116	0.47	56
Med	119	4252	152	0.33	28
Low	83	2622	194	0.23	14

**Energy Guide FTC**

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
36	4669	10	130

**Light Bulb Information (120V)**

Bulb Type	Watts	Lumens Amount	Color Temp	CRI
LED	18	1400	3000	90%